INSTALLATION INSTRUCTION FOR 1420

For Wall Mount Light Fixtures

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

PREPARATION

1. Shut off power at the fuse box or circuit breaker box. If necessary. Remove old fixture and all mounting hardware from wall junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take not to loose any small parts necessary for installation.

MOUNTING THE FIXTURE (FIG1)

3. Secure mounting bar (A) to junction box with junction box screws (B).
4. Thread nut (D) onto nipple (E) so that five threads are exposed above nut (D). Insert lock washer(C) and thread the nipple (E) into mounting bar (A), then secure with the nut (D).
5. Thread nut (J) onto nipple (K) so that five threads are exposed above nut (J). Insert lock washer (I) and thread the nipple (K) into bracket (H), then secure with the nut (J).
6. Raise the canopy (F) allowing for the nipple (E) to protrude through the hole on the canopy (F) then secure with the finial (G).

CONNECTING THE WIRES (Fig.2)

7. Connect the fixture wires to the junction box wires as shown in Fig. 2. Make sure all wire connectors are secure and do not easily pull off with a slight tug. If there is no Green Ground Wire from the junction box, connect the Fixture Ground Wire to the Circular Strap or the Crossbar with the Green Screw provided.
8. Tuck these wire connections neatly into the wall junction box.

COMPLETING THE INSTALLATION

9. Install the proper light bulb for your fixture.

DO NOT EXCEED THE SPECIFIED WATTAGE!

10. Slide the iron washer (L), plastic washer (M), glass (N), plastic washer (O) and iron washer (P) onto the nipple (K), and secure glass (N) with screw collar ring (Q).
11. Raise the frame (R) allowing for the frame (R) to protrude through the nipple (K), then secure with the finial (S).

Return the power to the junction box and test the fixture. Your installation is now complete.

FIG.1

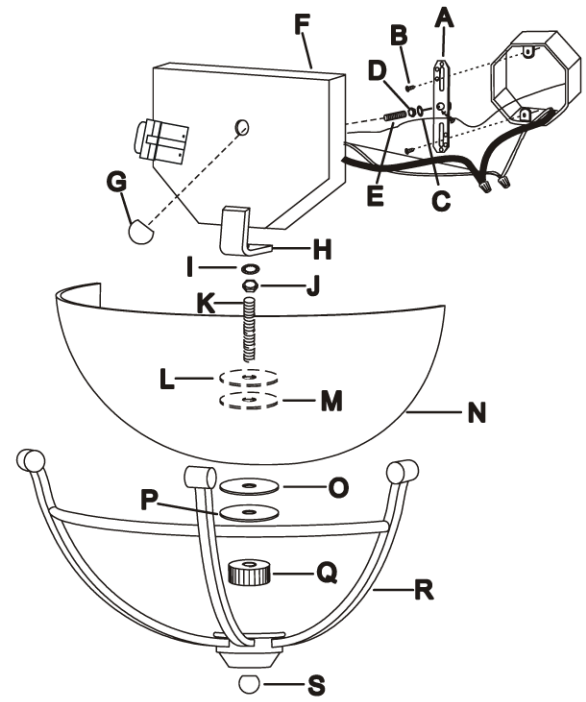

Fig.2

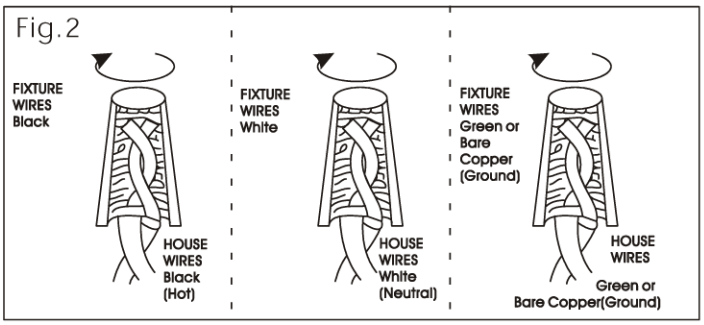

UL LISTED american lighting association